


The Light Modulator

Checking the function and adjusting the amplification volume

- Open the lid of the solar panel / receiver by unscrewing the four screws
- Check that all wires are well connected, especially the slide-on wires, A
- Check that the stereo jack and socket is inserted, "B"
- Place two AA batteries in the battery box and turn the red side-switch on. Ensure the batteries are correctly placed and make contact
- Switch the speaker on: Slide the speaker side switch towards the solar panel
- Have the solar panel face a AC powered desk lamp or room light. You should hear a humming sound
- Adjust the sound amplification on the blue-white adjustable resistor, C, with a small screwdriver
- Now connect the flashlight to a phone, play a song and shine the light on the panel. Adjust the sound level so it is loud but not distorted.
- Close the box and replace the screws

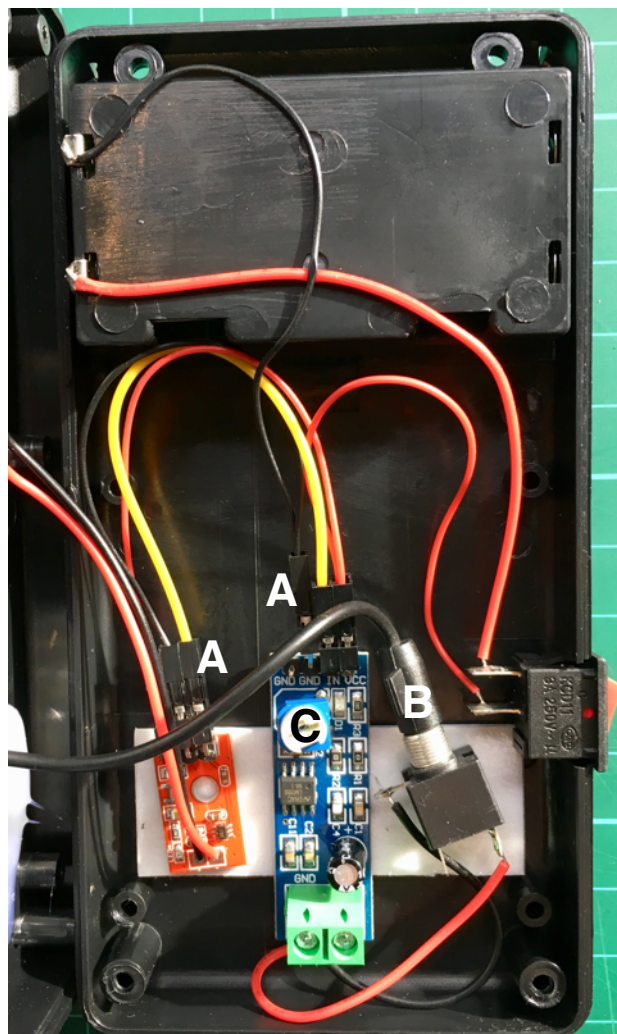

If you still experience a problem, please contact your supplier for a replacement.